


Specifications

Model Number:	10-0035C
Input Voltage:	220/240 VAC
Frequency:	50/60 Hz.
Lamp Types:	See Chart On Next Page
Certifications:	CSA® (USA & Canada) / RoHS
Size:	6.25" (Max) x 2.5" x 1.75"
Weight:	11 oz.
Mounting:	slotted mounting tabs
Special Features:	Green LED



1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.

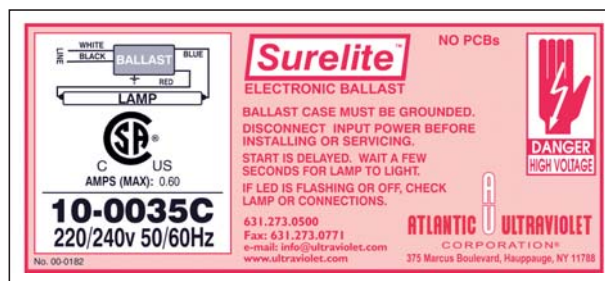

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Lamp Types

Instant Start Lamps	Preheat Lamps
G12T5L	GPH212T5L
G10T5½L*	GPH238T5L
G18T5L*	GPH250T5L
G18T5L/U*	GPH254T5L
G24T5L*	GPH287T5L
G24T5L/U	GPH303T5L
G30T5L	GPH330T5L
G30T5L/U	GPH357T5L
G36T5L*	GPH436T5L
G36T5L/U	GPH450T5L
G37T5L	GPH463T5L
G48T5L*	GPH620T5L/4
G48T5L/U	GPH793T5L/4
G64T5L*	GPH810T5L/4
G64T5L/U*	GPH843T5L/4

*For CSA Certified operation Canada & US.

Lamps listed are Low Ozone type but Ozone Producing lamps in these same lengths can also be used.

This ballast may be acceptable for use with lamps not listed here. Contact us to discuss your requirement.

Connections

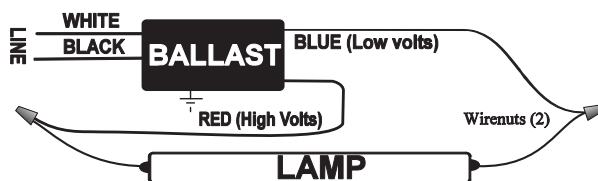


Figure 1- Typical Connections from Ballast for use with Instant Lamps

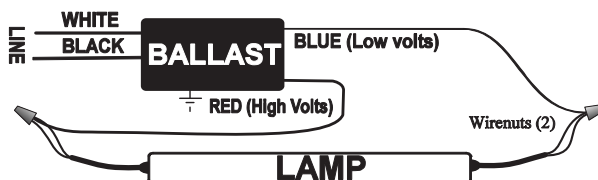


Figure 2- Typical Connections from Ballast for use with Preheat Lamps

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.