



PROSCAN

<u>MODEL #</u>	<u>"A"</u>	<u>HOUSING</u>	<u>LENS</u>	<u>GASKET</u>	<u>WEIGHT</u>
1.50" PROSCAN	1.984"	316 SS	SAPPHIRE	FDA SILICONE	TBD
2.00" PROSCAN	2.516"	"	"	"	3LB
2.50" PROSCAN	3.047"	"	"	"	TBD
3.00" PROSCAN	3.579"	"	"	"	TBD



	<u>ANALOG</u>	<u>DIGITAL</u>
PIN 1:	- mA's INPUT	RX- / TX-
PIN 2:	+mA's INPUT	RX+ / TX+
PIN 3:	+12-24VDC SUPPLY	
PIN 4:	-SUPPLY	
PIN 5:	NO CONNECTION	

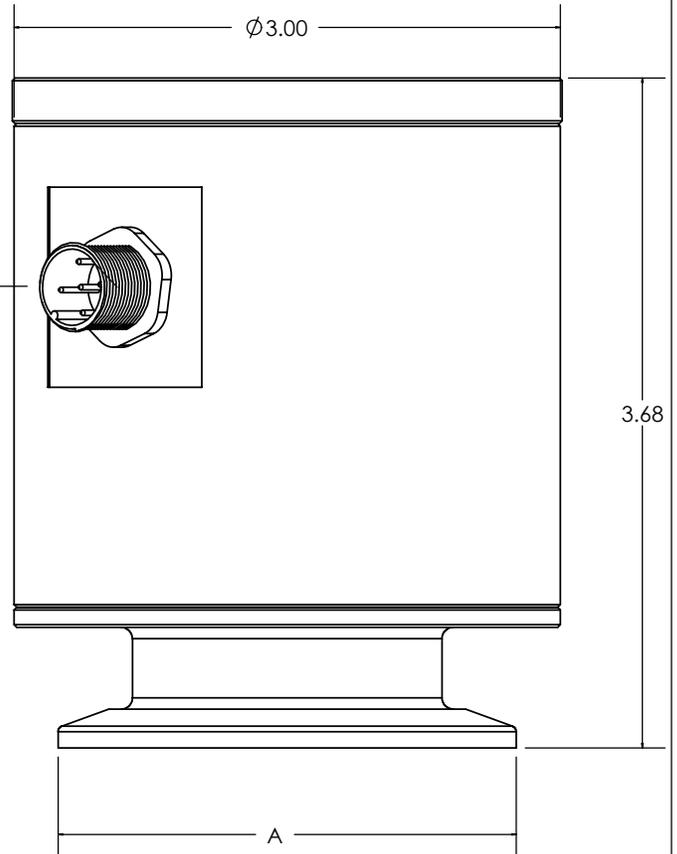

NOTE:

ALL PROSCAN MODELS HAVE OPTION FOR EITHER ANALOG (DEFAULT) OR DIGITAL OUTPUT. REGISTERED WITH 3-A SANITARY STANDARDS.

	NAME	DATE	AW COMPANY PROSCAN	
DRAWN	SCOTT H.	06/15/04		
CHECKED				
ENG APPR.				
MFG APPR.				
	Q.A.			
COMMENTS:			SIZE	DWG. NO.
<p style="text-align: center;">PROPRIETARY AND CONFIDENTIAL</p> <p style="text-align: center;">THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF AW COMPANY IS PROHIBITED.</p>			A	PROS800A
			SCALE: NON	WEIGHT:
			SHEET 1 OF 1	