

INTERROLL SINGLE BLADE STOP RM 5775



Roller Conveyors
Key Elements
RM 5775
Stop

The Interroll Single Blade Stop RM 5775 is an electrically actuated stop that is raised between the roller pitches in order to stop or accumulate material. Stops are often used in conjunction with conveying components such as transfers and pushers for aligning products or policing processes.

Technical Data

General technical data

Max. accumulation pressure	22 lbf (100 N)
Ambient temperature	+40 to +125 °F (+5 to +50 °C)


Drive

Rated voltage	24 V DC
Electrical power	0.05 kW

Side frame

Combination of frame heights left/right	Suitable for all frame combinations
---	-------------------------------------

Dimensions

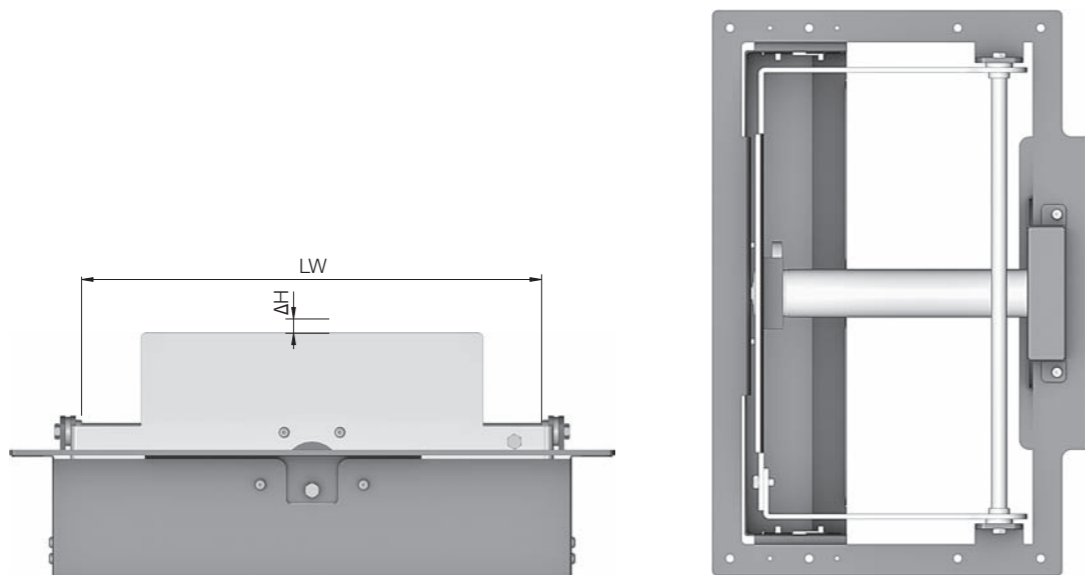


Dimensions

LW Clearance	12" to 30" (310 mm to 760 mm)
P Min. roller pitch	2.95 (75 mm)
ΔH stroke	1" (25 mm) (0.16" (4 mm) below top of roller up to 0.8125" (20.83 mm) above top of roller)

Order Information

- The module is fully assembled, including sensors
- Steel components are powder-coated (in black RAL 9005 or in gray RAL 7030) or zinc-plated

Please create the reference number with the following configurator.

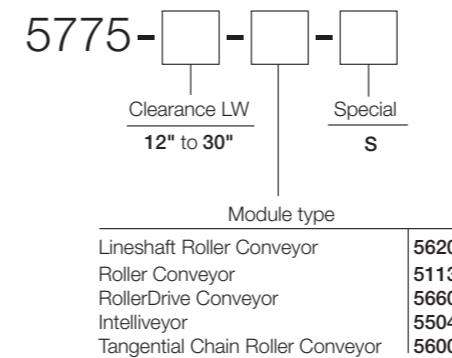

If you require a non-standard version, add an „S“ to the end and describe your requirements.

Example of a reference number: 5775-20-5620

This reference number stands for Interroll Single Blade Stop RM 5775 with a clearance LW 20" (510 mm) and the module type Interroll Lineshaft Roller Conveyor RM 5620.

Scope of supply

Configurator

Order example