
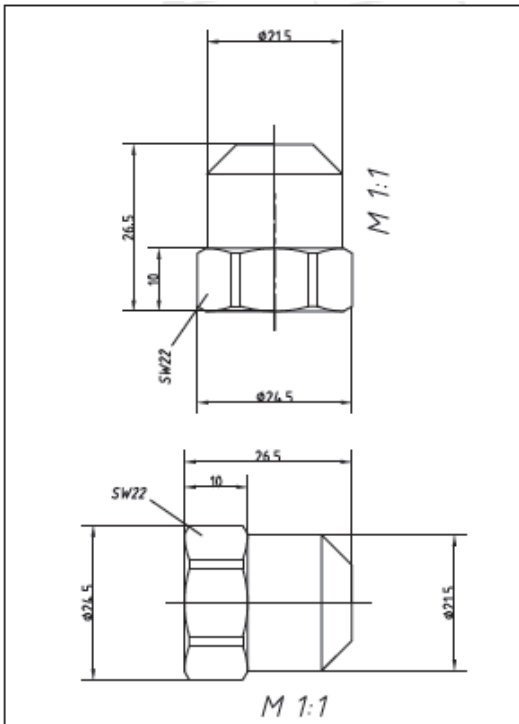


Full Cone Nozzles, 3/8" female thread Series 486

Full cone nozzles with 3/8" BSP female thread, Circular uniform full cone spray pattern. Very common in secondary cooling systems of billet and bloom casters.



spray angle	Type	Mat.-No.		Thread code	Code	flow rate V [l/min]
		90	1C			pressure p [bar]
45°	486.443	●	●	AF	1545 L	1,50
	486.493	●	●	AF	2045 L	2,00
	486.563	●	●	AF	3045 L	3,00
	486.593	●	●	AF	3545 L	3,50
	486.613	●	●	AF	4045 L	4,00
	486.653	●	●	AF	5045 L	5,00
	486.683	●	●	AF	6045 L	6,00
	486.713	●	●	AF	7045 L	7,00
	486.733	●	●	AF	8045 L	8,00
	65°	486.444	●	●	AF	1565 L
486.494		●	●	AF	2065 L	2,00
486.534		●	●	AF	2565 L	2,50
486.564		●	●	AF	3065 L	3,00
486.594		●	●	AF	3565 L	3,50
486.614		●	●	AF	4065 L	4,00
486.634		●	●	AF	4565 L	4,50
486.654		●	●	AF	5065 L	5,00
486.674		●	●	AF	5565 L	5,50
486.684		●	●	AF	6065 L	6,00
486.704		●	●	AF	6565 L	6,50
486.714		●	●	AF	7065 L	7,00
486.724		●	●	AF	7565 L	7,50
486.734		●	●	AF	8065 L	8,00
486.744		●	●	AF	8565 L	8,50
486.754		●	●	AF	9065 L	9,00
486.764		●	●	AF	9565 L	9,50
486.774		●	●	AF	10065 L	10,00
486.814		●	●	AF	12065 L	12,00
486.834		●	●	AF	14065 L	14,00
486.854	●	●	AF	15065 L	15,00	
486.864	●	●	AF	16565 L	16,50	
90°	486.446	●	●	AF	1590 L	1,50
	486.496	●	●	AF	2090 L	2,00
	486.536	●	●	AF	2590 L	2,50
	486.566	●	●	AF	3090 L	3,00
	486.596	●	●	AF	3590 L	3,50
	486.616	●	●	AF	4090 L	4,00
	486.636	●	●	AF	4590 L	4,50
	486.656	●	●	AF	5090 L	5,00
	486.676	●	●	AF	5590 L	5,50
	486.686	●	●	AF	6090 L	6,00
	486.706	●	●	AF	6590 L	6,50
	486.716	●	●	AF	7090 L	7,00
	486.726	●	●	AF	7590 L	7,50
	486.736	●	●	AF	8090 L	8,00
	486.746	●	●	AF	8590 L	8,50
486.756	●	●	AF	9090 L	9,00	
486.766	●	●	AF	9590 L	9,50	
486.776	●	●	AF	10090 L	10,00	
486.816	●	●	AF	12090 L	12,00	
100°	486.597	●	●	AF	35100 L	3,60