


UNISOURCE
Series 401
Stainless Steel
Connector,
Threaded

Construction, Materials:

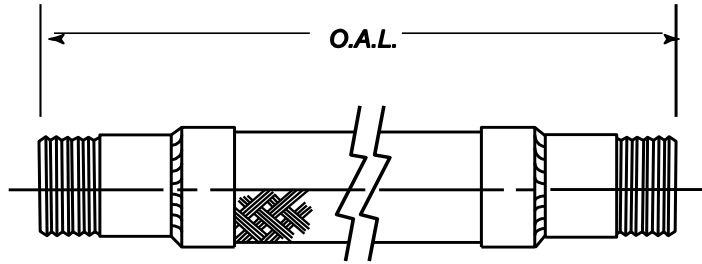

Hose: *Series 300 Stainless Steel Corrugated Hose*

Braid: *Series 300 Stainless Steel. One Braid*

Ends: *Carbon Steel Male NPT.*

Maximum permanent offset from centerline: 3/8"
Maximum intermittent offset from centerline: 1/8"

Qty	Size (In.)	Part #	Overall Length (Inches)	W.P. @ 70 Deg. F. (psi)	W.P. @ 250 Deg. F (psi)	Approx. Corr Count Per Foot	Min. Bend Rad Static (In.)	Min. Bend Rad Dynamic (In.)	Approx. Weight (Lbs.)
	1/2	401-050	6-1/2	990	911	108	1.75	7	0.4
	3/4	401-075	7	750	690	89	2.5	9.5	0.5
	1	401-100	8	605	557	82	3	11	0.8
	1-1/4	401-125	8-1/2	570	524	67	4	12	1.0
	1-1/2	401-150	9	410	377	64	5.5	13	1.3
	2	401-200	10-1/2	455	419	62	7	16	2.0
	2-1/2	401-250	12	345	317	26	8	18	5.0
	3	401-300	14	290	267	30	10	22	8.0
	4	401-400	16	250	230	21	13	26	13.0

Customer: _____

Project: _____

Engineer: _____

PO#: _____

UNISOURCE MFG.

*Unisource Series 401
 Stainless Steel Threaded Connector*