




FEATURES



- 2"~24" (DN50~DN600)
- W.P. : PN16 / CLASS 150
- W.T. : -20°C~200°C (-4°F~392°F)
- Investment casting

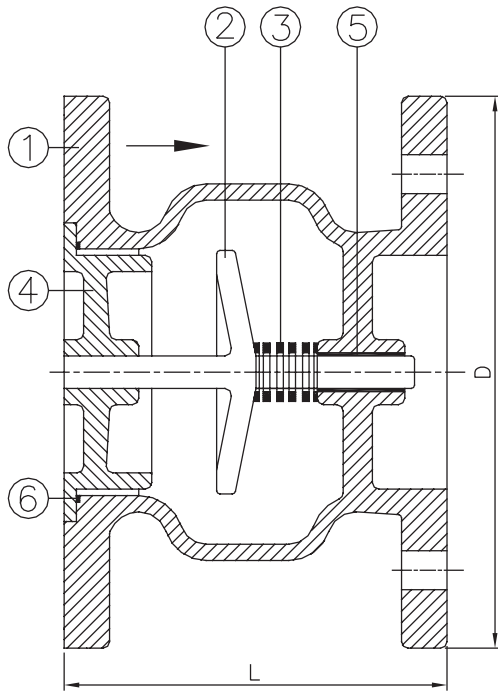

| ITEM | PARTS | MATERIAL | |
|------|---------|----------------|---------------|
| 1 | BODY | ASTM A351-CF8M | ASTM A216-WCB |
| 2 | DISC | AISI 316 | AISI 304 |
| 3 | SPRING | | |
| 4 | SEAT | | |
| 5 | BUSHING | VITON | BUNA-N |
| 6 | SEAL | | |

| DN | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| L | 133 | 140 | 154 | 187 | 216 | 248 | 321 | 399 | 362 | 400 | 448 | 500 | 523 | 600 |
| D | 152 | 178 | 191 | 229 | 254 | 279 | 343 | 406 | 483 | 535 | 595 | 635 | 700 | 813 |

unit:mm

| NPS | 2" | 2-1/2" | 3" | 4" | 5" | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | 24" |
|-----|------|--------|------|------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 5.24 | 5.51 | 6.06 | 7.36 | 8.5 | 9.76 | 12.64 | 15.71 | 14.25 | 15.75 | 17.64 | 19.69 | 20.59 | 23.62 |
| D | 5.98 | 7.01 | 7.52 | 9.02 | 10 | 10.98 | 13.5 | 15.98 | 19.02 | 21.06 | 23.43 | 25 | 27.56 | 32.01 |

unit:in