

30-27

Safety cable with loop

Item description/product images



Description

Material, version:

Stainless steel safety cable
with plastic coating.
Aluminium crimp lug and cable crimp.


Note:

The safety cable, together with the keyring (30-27-1/2/3) can be used to make sure the ball locking pin (30-26) does not get lost. The cable can be fastened using an M5 screw.

Temperature range:

+80 °C

Drawings

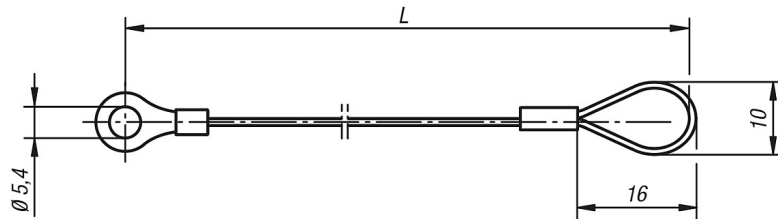

Overview of items

Order No.	L
30-27-20	150
30-27-21	200
30-27-22	300