


Item description/product images

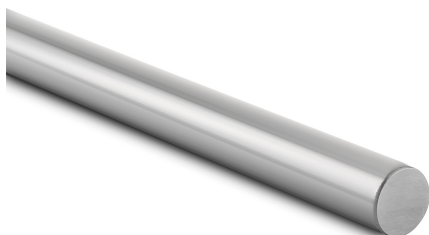

Description

Material:

50-153: stainless steel 1.4034.

50-154: stainless steel 1.4112.

Version:

50-153 hardened and ground.

50-154 hardened and acid-proof treated.

Hardness 54 ±2 HRC.

OD tolerance h6.

Note:

50-153 is for non-corrosion applications.


50-154 is especially suitable for food, pharmaceutical, medical and chemical applications.

On request:


Other diameters.

Stainless steel 1.4125.

Machining examples:

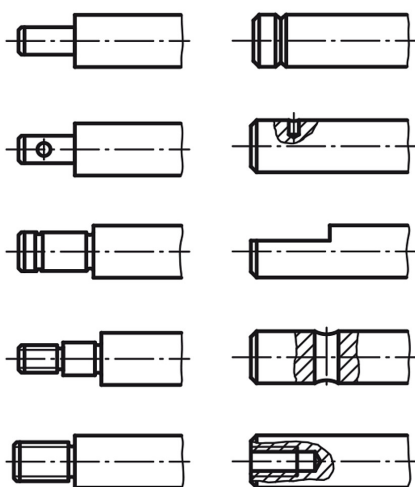

Drawings

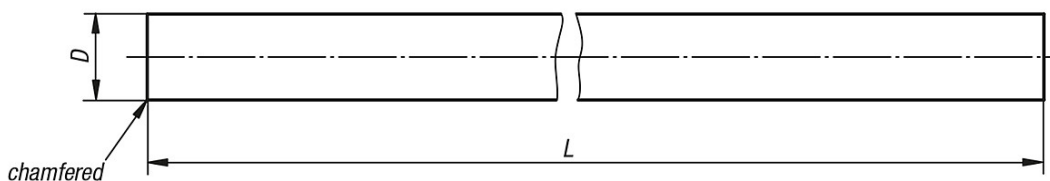

Overview of items

Order No.	Material	D	Hardness penetration depth max.	Manufacturing lengths max. mm
50-153-5	1.4034 HRC 51-55	12 h6	1,3	4.900
50-153-8	1.4034 HRC 51-55	16 h6	1,6	4.900
50-153-9	1.4034 HRC 51-55	20 h6	1,8	4.900
50-153-10	1.4034 HRC 51-55	25 h6	2	4.900
50-153-11	1.4034 HRC 51-55	30 h6	2,4	4.900

Order No.	Material	D	Hardness penetration depth max.	Manufacturing lengths max. mm
50-154-7	1.4112. HRC 52-56 acid-resistant	12 h6	1,3	7.800
50-154-10	1.4112. HRC 52-56 acid-resistant	16 h6	1,6	7.800
50-154-11	1.4112. HRC 52-56 acid-resistant	20 h6	1,8	7.800
50-154-12	1.4112. HRC 52-56 acid-resistant	25 h6	2	7.800

Overview of items

Order No.	Material	D	Hardness penetration depth max.	Manufacturing lengths max. mm
50-154-13	1.4112. HRC 52-56 acid-resistant	30 h6	2,4	7.800