

Item description/product images



Description

Material, version:

Metal parts, stainless steel 1.4401.

Elastomer, natural rubber, hardness medium Shore 55A, grey.

Note:

Rubber impact buffers are characterised by their robustness and the cushioning and shock dampening effect. Rubber impact buffers are ideally suited for elastic travel limitation and cushioning of shocks by mobile and static plant units, machines and as stops in general.


Temperature range:

-30°C to +80°C.

On request:

Metal parts, stainless steel 1.4301.

Drawings

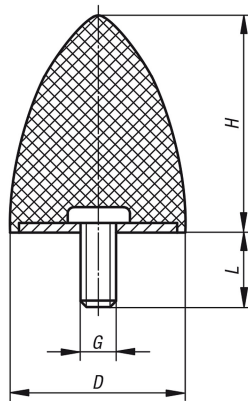

Overview of items

Order No.	D	H	G	L	Approx. weight kg
50-174-1	20	24	M6	18	0,011
50-174-2	30	36	M8	23	0,037
50-174-3	35	40	M8	23	0,045
50-174-4	50	58	M10	28	0,127
50-174-5	50	67	M8	38	0,136
50-174-6	75	89	M12	37	0,341