


0.1	▽	Ra
0.2	▽	JIS
1.6	▽	
6.3	▽	
25	▽	

±0.1	0.5~5	GENERAL TOLERANCE
±0.22	6~30	
±0.3	31~120	
±0.5	121~320	
±0.8	321~1000	

HAITIMA CORPORATION
 P.O.BOX 34-36 TAIPEI
 Tel:+886-2-26585800

E-mail:haitima@seed.net.tw
 TAIWAN R.O.C. www.haitima.com.tw
 Fax:+886-2-26582266

PART DC

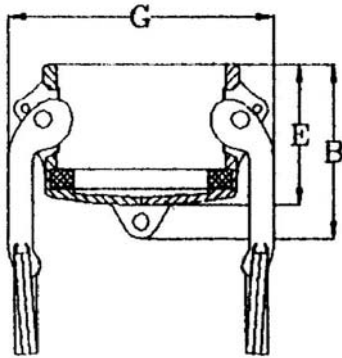

Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
Size of Thread	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"
G: Max O.D.	45.7	53.3	60.9	82.6	90.3	99.8	112.4	137.6	165.6	238.3
B: Overall Length	43.2	46	53	55.2	59.4	65.2	69.8	71.5	72	85.77
E: Exposed Length	33.6	34	41	46.5	47.7	53.2	57.8	59.5	60	70.5

unit:mm



HAITIMA CORPORATION

CHECK BY	DRAWING BY	DATE	SPECIFICATION	Cam & Groove Couplers & Adapters
	Sammy	Apr.21.2014	MATERIAL	SS 316
			PROCESS/Nr.	
			UNIT / SCALE	mm

△			
△			
△			
Revise	Description	Date	Approve
DRAWING NO. FK-07		-14	