


Articulated feet, sanitizable

(base in stainless steel)

Ø 120 Part. 109

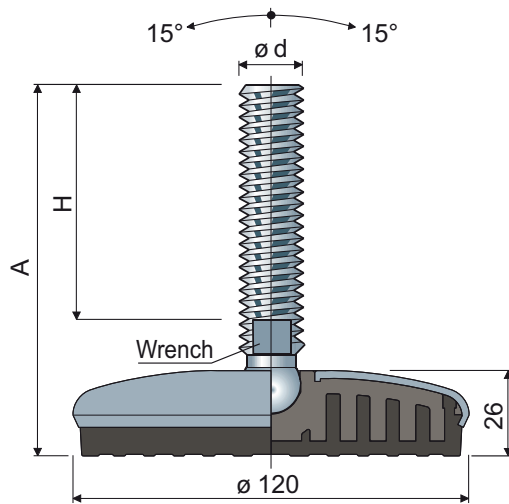


Spindle measures in mm					Spindle and base in stainless steel AISI 304 Code	Max static load (N)
ød	A	H	Wrench			
M16	103	60	13		109 / 83558	25000
	133	90	13		109 / 83559	
	148	105	13		109 / 83560	
	168	125	13		109 / 83561	
	198	155	13		109 / 83562	
	208	165	13		109 / 83563	
M20	248	205	13		109 / 83564	27000
	132	86	17		109 / 83565	
	162	116	17		109 / 83566	
	187	141	17		109 / 83567	
M24	252	206	17		109 / 83568	29000
	142	96	19		109 / 83569	
	168	122	19		109 / 83570	
	198	152	19		109 / 83571	
	228	182	19		109 / 83572	
	346	300	19		109 / 83573	

Spindle measures in inches					Spindle and base in stainless steel AISI 304 Code	Max static load (N)
ød	A	H	Wrench			
5/8"-11 UNC	8,70"	7"	1/2"		109 / 83594	25000
3/4"-10 UNC	8,78"	7"	5/8"		109 / 83595	27000

Material: Internal part made of reinforced polyamide; external covering made of stainless steel AISI 304; anti-slip pad made of soft PVC 68 shore black colour.
Box quantity: 8 pieces.


Features: Comoulded anti-slip pad allows a perfect adherence with steel base. Consequent absence of internal cavities makes foot extremely cleanable.

Washers UNI 6592-69 - Box quantity: 24 pieces.



øM	M16	M20	M24
Smm	3	3	4
øAmm	30	37	44
Stainless steel codes	7291	7292	7294

Nuts UNI 5588-65 - Box quantity: 24 pieces.



ød	M16	M20	M24
Smm	13	16	19
Ch. mm	24	30	36
Stainless steel codes	7277	7278	7280

On request

- Spindles with: Sunk hexagon head • second wrench seat head • hexagon wrench seat • threads with other pitches and lengths.
- Anti-slip pads: White color.
- Box quantity: Not standard.
- Assembling of: Nuts • washers.