



2

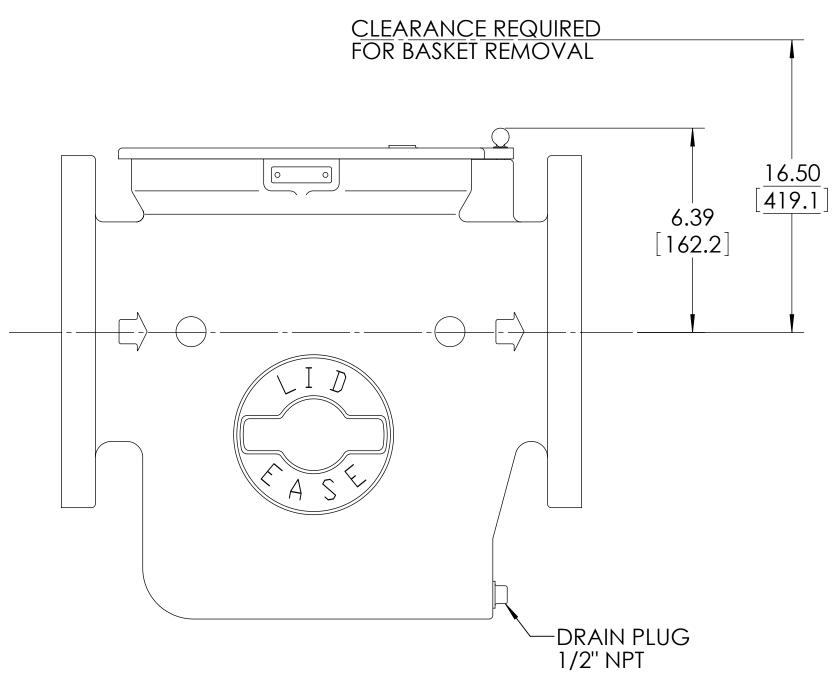

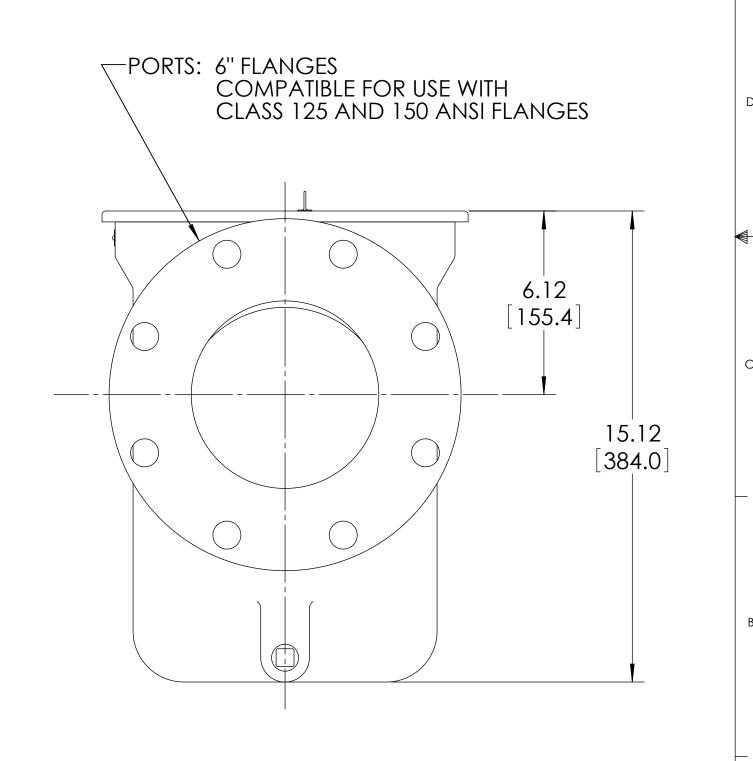

## NOTES:

1. REFER TO VIKING CATALOG SECTION 640 FOR -XXX MODEL NUMBER CLARIFICATION.

	MESH	10	20	40	60	80	100	USE AND RELATED INFORMATION	
`   	OPENING (INCHES)	.075	.034	.015	.0092	.007	.0055	AAATEDIAI	
	OPENING (MICRONS)	1910	860	380	230	190	140	MATERIAL:  WAS:	

Unless Otherwise specified Dimensions are in <b>inches.</b>
INTERPRET DIM AND TOLERANCES PER VIKING PUMP ES-47 BREAK EDGES .005015 RADIUS OR CHAMFER
.XX ±.02 .XXX ±.005 ANGLES ±5°
ALL FINISHED SURFACES $(AA^{0.030})$

ALL FINISHED SURFACES V CUTOFF CUTOFF ACCEPTABILITY OF SCREW THREADS SHALL BE DETERMINED BASED ON SYSTEM 21 ASME B1.3

THIRD ANGLE PROJECTION

	STATE	Relec	ased	07/26/2013
S-47	DRAWN	jpiei	rce	6/30/2011
	CHECKED	BAM		07/25/2013
	PROJECT		00	WEIGHT:
	SCALE: 1:3		<b>2</b> D	LBS

CASTING NUMBER

	VIKING PUMP, INC. A Unit of IDEX Corporation Cedar Falls, IA 50613 U.S.A.	THIS DRAWING IS THE PROPERTY OF VIKING PUMP, INC. AND IS PROPRIETAR' IN GENERAL AND DETAIL. IT SHALL NOT B COPIED OR ITS CONTENTS REVEALED TO OUTSIDE PARTIES WITHOUT THE WRITTEN				
3	PUMP U.S.A.	CONSENT OF VIKING PUMP, INC.				
	STRAINER ASSEMBLY, 6" FLANGES - MODELS F-1060-					
}	FDUC-XXX, F-1060-FIRN-XXX, F-10	16U-F331-XXX				
	(A.2)					

A.2

F-1060-F