

MPC2

High efficiency filter / regulator air set




spirax
/sarco

MPC2 high efficiency filter/regulator air set for the highest quality compressed air for instrument and control systems

The MPC2 filter eliminates problems due to poor air quality
100 % water removal at line temperature.
Solid particulate removal to 0.01 micron.
Oil aerosol removal to 0.01 mg/m³

Typical applications

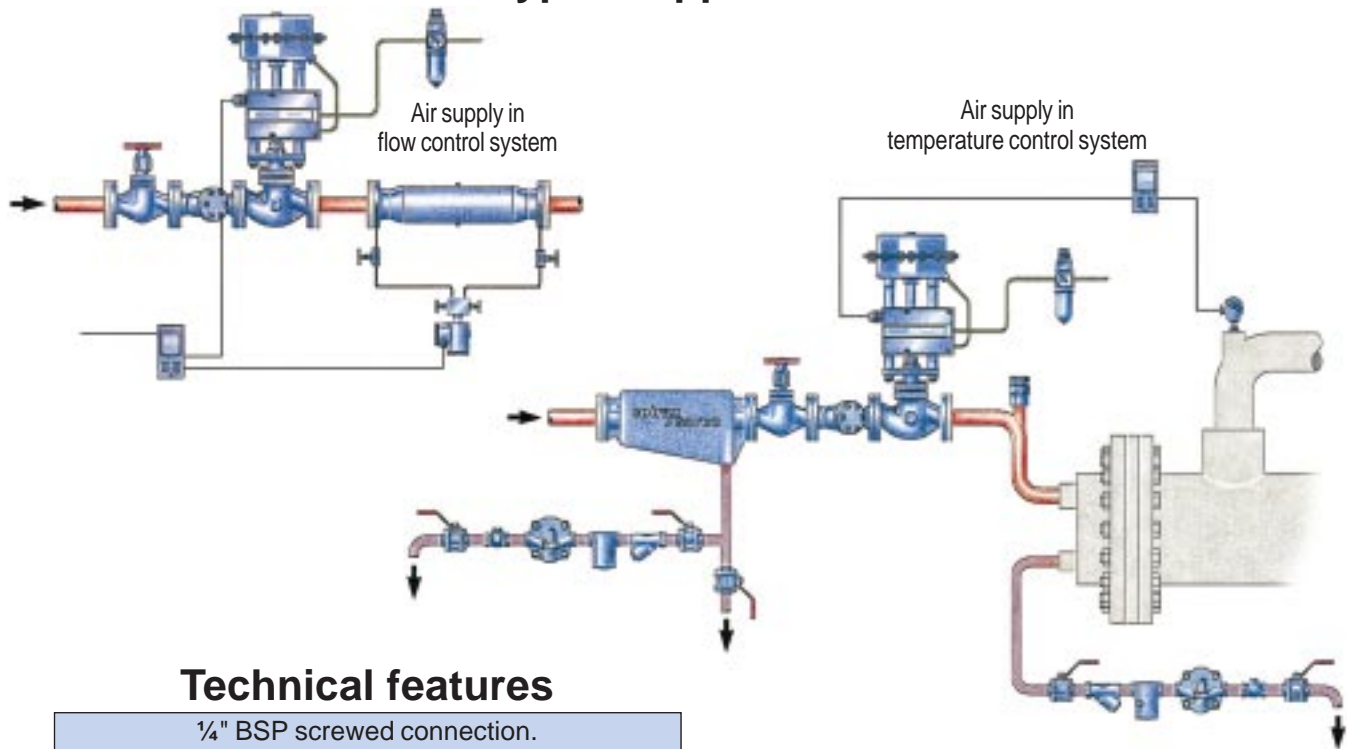

Technical features

1/4" BSP screwed connection.
Choice of operating pressure range: 0.2 - 2.0 bar g 0.3 - 4.0 bar g 0.7 - 9.0 bar g
Epoxy finish for greater protection.
Bowl with or without manual drain.

Available as single unit or complete kit

Kit comprises:

MPC2 0.2 - 2.0 bar g,
FK21 bracket,
Mounting ring,
Pressure gauge, 40 mm, 0.7 bar g,
1/4" / 6 mm tube fittings.

For:

- Pneumatic and electropneumatic positioner air supply.
- Pneumatic instruments.
- Air gauging systems.
- Air supply to small air bearing.
- Fluidic circuits.

User benefits

- Perfect air quality for precision control.
- Reduced downtime.
- Long element life.

Spirax-Sarco Limited, Charlton House,
Cheltenham, Gloucestershire, GL53 8ER UK.
Tel: +44 (0)1242 521361 Fax: +44 (0)1242 573342
E-mail: enq@spiraxuk.attmail.com
Internet: www.spirax-sarco.com

© Copyright 1999 Spirax Sarco is a registered trademark of Spirax-Sarco Limited

spirax
sarco

SB-P054-06

CH Issue 2